

















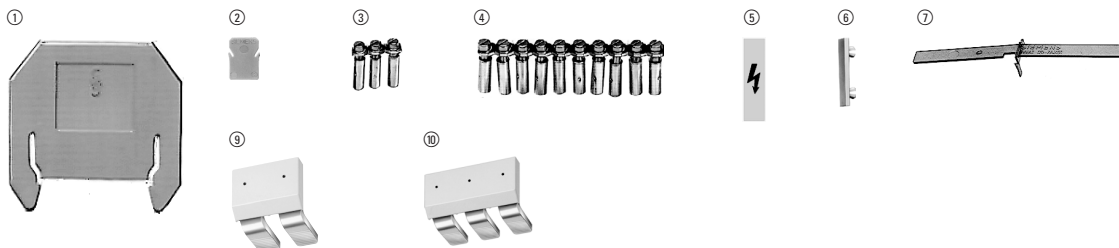
Terminal Blocks

8WA1 Terminals with Screw Connection

Through-type terminals

With insulating body of molded thermoplastic · With screw connections on both sides

| Dimensions ³⁾ | IEC ratings uninterrupted current | UL ratings current / voltage | Description | Design Color | Fig. No. | Order No. | Price |
|---|--|------------------------------------|---|--|-------------|---|-------|
| | IEC ratings insulation voltage | | | | | | |
|  <p>8WA1 205</p> | Terminal size 35 · Assembly width 16 mm  AWG 10-1  AWG 12-2 | | Single terminal | beige blue | | 8WA1 205 8WA1 011-1BM11 | |
| | 125 A 800 V | 120 A 600 V | Terminal block, 3-pole | width 48 mm | | 8WA1 305 | |
| | | | Barrier | width 1.5 mm | ① | 8WA1 823 | |
| | | | Small partition for single terminal (to 500 V) | | ② | 8WA1 822-7TK00 | |
|  <p>8WA1 305</p> | 125 A | | Link rail for | 2 terminals 3 terminals 10 terminals | ③ ④ | 8WA1 828 8WA1 803 8WA1 804 | |
| | - | | Cover | with warning arrow white, for inscription | ⑤ ⑥ | 8WA1 813 8WA1 893 | |
| | | | for link rails ¹⁾ , length 100 mm | transparent white, for inscription | ⑦ | 8WA1 822-7AX02 8WA1 822-7AX04 | |
| | | | | | | | |
|  <p>8WA1 206</p> | Terminal size 70 · Assembly width 25 mm  AWG 8-3/0  AWG 8-1/0 | | Single terminal | beige blue | | 8WA1 206 8WA1 011-1BP11 | |
| | 192 A 800 V | 220 A 600 V | Barrier | width 1.5 mm | ① | 8WA1 824 | |
| | 192 A | | Link rail | for 2 terminals | | 8WA1 216 | |
| | - | | Cover | with warning arrow | ⑤ | 8WA1 814 | |
|  <p>8WA1 011-1DQ10</p> | Terminal size 95 · Assembly width 25 mm  AWG 4/0-2  AWG 4/0-2 AWG | | Single terminal ²⁾ | beige | | 8WA1 011-1DQ10 | |
| | 232 A 1000 V | 230 A 600 V | Cover | with warning arrow | ⑤ | 8WA1 822-7AQ00 | |
| | | | Link | for 2 terminals for 3 terminals | ⑨ ⑩ | 8WA1 822-7VQ12 8WA1 822-7VQ13 | |
| | | | | | | | |
|  <p>8WA1 011-1DS10</p> | Terminal size 150 · Assembly width 31 mm  AWG 300 mcm - 2 AWG  AWG 300 mcm - 2 AWG | | Single terminal ²⁾ | beige | | 8WA1 011-1DS10 | |
| | 309 A 1000 V | 275 A 600 V | Cover | with warning arrow | ⑤ | 8WA1 822-7AS00 | |
| | | | Link | for 2 terminals for 3 terminals | ⑨ ⑩ | 8WA1 822-7VS12 8WA1 822-7VS13 | |
| | | | | | | | |
|  <p>8WA1 011-1DU10</p> | Terminal size 240 · mounting width 36 mm  AWG 500 mcm - 2/0 AWG  AWG 500 mcm - 2/0 AWG | | Single terminal ²⁾ | beige | | 8WA1 011-1DU10 | |
| | 380 A 1000 V | 370 A 600 V | | | | | |
| | | | | | | | |
| | | | | | | | |



Labelling accessories see page 15/40 - 43.

1) Only to be used for single terminals 3) 25.4 mm = 1.00 inch.
2) Tightening torque MA = 15 Nm

Discount Code: Terminal Blocks