



TEL (915) 590-8500
FAX (915) 590-8510

Reference Files Used:

- 51010xls rev 39P
- 500446 rev 8P
- 500444 rev 4P
- 500443 rev 13P
- 500445 rev 2P
- 500440 rev 4P

SIEMENS

Cat. No. HF362 **Fusible Heavy Duty Safety Switch** **Type VB II**
60 Amps Maximum **600 Volts AC(V~)Maximum** **600¹¹Volts DC(V=)Maximum**
Type 1 **Indoor**

Horsepower Ratings	240 VAC ¹ 1Ø	240 VAC 3Ø	480 VAC ¹ 1Ø	480 VAC 3Ø	600 VAC ¹ 1Ø	600 VAC 3Ø	250 VDC ¹	600 ¹¹ VDC ¹
Std. HP (Std. Fuse) ⁴	3	7½	5	15	10	15	10	25
Max. HP (Time Delay)	10	15	20	30	25	50	—	30

Continuous load current not to exceed 80% of the rating of fuses employed in other than motor circuits.
Suitable for use as Service Equipment when used with ground bar kit **HG61234** on 3 phase, 3 wire systems or when used with **HN623** neutral kit on 1 phase, 3 wire or 3 phase, 4 wire systems.

Fuse and Short Circuit Information

When used with Class K fuses, Class H fuses or a UL Listed Circuit Breaker rated for 10,000 amperes, RMS symmetrical, **600** volts maximum, this switch is suitable for use on a circuit capable of delivering not more than 10,000 amperes, RMS symmetrical, **600** volts, maximum.

When used with Class R fuses and Class R fuse clip kit **HR62** properly installed, this switch is suitable for use on a circuit capable of delivering not more than 200,000 amperes, RMS symmetrical, **600** volts maximum.

When used with Class J fuses with the load base relocated to the "J Fuse" position marked on the enclosure this switch is suitable for use on a circuit capable of delivering not more than 200,000 amperes, RMS symmetrical, **600** volts maximum.

Danger – Unless class R or J fuses are used, this switch may present a risk of fire and injury to persons if installed on circuits capable of delivering more than 10,000 amperes, RMS symmetrical.

When used with fuses marked with DC ratings, this switch is suitable for use on a circuit capable of delivering not more than the DC interrupting rating marked on the fuse, at the DC voltage rating marked on the fuse, up to a maximum of 10,000 amperes, **600¹¹** volts DC.

Danger – Unless fuses marked for an interrupting rating of 10,000 amperes at **600¹¹** volts DC are used, this switch may present a risk of fire and injury to persons if installed on circuits capable of delivering more than 10,000 amperes.

Renewable link fuses are not recommended.

DANGER

Hazardous voltage. Will cause death or serious injury.

- Disconnect and lock out power supplying this switch before working on this switch.
- Turn off switch before removing or installing fuses if so equipped.
- Always use a properly rated voltage sensing device on all fuse clips (Fusible) or all load side terminals (Non-Fusible) to confirm switch is off.
- Close or replace cover before turning power on.

Terminal & Wire Information **USE 60°C / 75°C COPPER OR ALUMINUM WIRE**

Description	Wire Range	Wire Tightening Torque ⁵	Lug Mounting Torque ⁵
Line, Load & Main Neutral	14-2 AWG	35 lb-ins, 14-10 AWG / 40 lb-ins, 8 AWG 45 lb-ins, 6-4 AWG / 50 lb-ins, 3-2 AWG	80 lb-ins.
Service Ground	14-4 AWG	35 lb-ins, 14-10 AWG / 40 lb-ins, 8 AWG 45 lb-ins, 6-4 AWG	24 lb-ins.

UL Listed Compression Lugs
(Refer to manufacturers instructions for proper installation)⁶

Wire Size (AWG OR kcmil)	Burdyn		Thomas & Betts		IlSCO	
	Cu Only	Cu / Al	Cu Only	Cu / Al	Cu Only	Cu / Al
14-10			256-30695-1352	60097		
8	YA8C-L1 Box YA8C-TC14	YA8CA3	54130 54930BE	60102 61102		ACL - 8
6	YA6C-L Box YA6C	YA6CA1	54105 54905BE	60107 61107	CRB-6 CRB-6L	ACL - 6
4			54106	61112	CRB-4	

Inspection record number:
Accessories


Accessories	Part No.	Accessories	Part No.	Accessories	Part No.
Aux. Switch (1NO - 1NC)	HA161234	Neutral	HN623	Class R Fuse Kit (Rejects Class H & K Fuses)	HR62
Aux. Switch (2NO - 2NC)	HA261234	Ground Lug Kit (Wire Range 14-4 AWG)	HG61234	Wire Grip Kit (CU)	HLC612
Low Voltage Aux. Sw. (1NO - 1NC)	HA361234	Isolated Ground Lug Kit	HG261234	Shield Kit	HSK62SSW
Compression Lug Neutral Barrier Kit	HCL623	Fuse Puller (3 per kit)	HP62		

Replacement

Replacement	Part No.	Replacement	Part No.	Replacement	Part No.
Line Base	HFB62	Wire Grip Kit (AL)	HL612	Handle / Handle Guard	HH6123
Load Base	HBB62	Mechanism	HM6123	Door	HF362DOOR

Protected by one or more of the following US Patents: 6,134,979, 6,356,460, 5,945,650, 5,990,439.
¹ Use outer two poles.
⁴ The starting current of motors more than the standard horsepower or kilowatt ratings may require the use of fuses with appropriate time delay characteristics.
⁵ When tightening or replacing connectors, refer to lug mounting torque in Terminal & Wire Information Table.
⁶ If compression lugs are used for the neutral, order compression lug neutral barrier kit HCL623.
¹¹ 600 VDC ratings apply when wired per cover wiring diagram.

For questions on this device please call 1-800-241-4453 Siemens Industry, Inc. Norcross, GA 30092 USA Pc. No. 502086E07 1103
<http://www.usa.siemens.com/powerdistribution> Assembled in Mexico

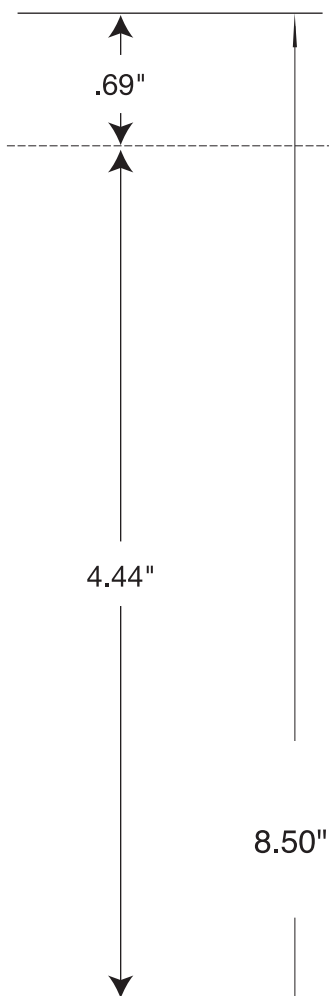

R .125"
X4

COMPANY NAME			JOB WILL NOT BE PRINTED UNLESS APPROVED BY CUSTOMER.		
SIEMENS INDUSTRY, INC.					
THIS DOCUMENT IS THE PROPERTY OF LABELTECH, INC. IT'S USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION OR FOR THE PERFORMANCE OF WORK REQUESTED FROM LABELTECH, INC. ALL QUESTIONS MUST BE REFERRED TO THE LABELTECH, INC. PRODUCTION DEPARTMENT.	MATERIAL		SIZE		<input type="checkbox"/> OK TO PRINT AS IS <input type="checkbox"/> MAKE CORRECTIONS, RESUBMIT CORRECTED PROOF <input type="checkbox"/> OK TO PRINT WITH CORRECTIONS AS MARKED
	Synthetic Paper		WIDTH		
	INK COLORS		LENGTH		AUTHORIZED BY DATE REVISION LEVEL 39P
	BLACK	185 RED	8.50"		
		ROUND CORNER RADIUS			
		.125"		DESIGNER Joel Ortega CHECKED BY DATE 04/06/12	
			PART NO. 502086E07 DESCRIPTION:		