

# Catalog Number: UA2717-YPGP

## Features and Ratings

- Ringless Type Meter Socket
- 160A Continuous, 200A Max, 2 Position, 200Amp Overall
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire, 600V AC
- 4 Jaw
- Horn Bypass
- For Overhead or Underground Service
- RX Hub Opening
- 7/8" Barrel Lock Provision

### CONNECTORS

CONNECTORS	WIRE SIZE	TORQUE
LINE, NEUTRAL LINE*	#1/0-600 Kcmil	375 IN-LB
LOAD, NEUTRAL LOAD*	#6-350 Kcmil	250 IN-LB
GROUND	#14-2	50 IN-LB

\* External Hex drive 1/2"  
\* Internal Hex drive 5/16"

### ACCESSORIES

HD Cover Plate  
Cat No: H56933-2






5th Terminal Use Talon Kit  
Cat No: 659-0121

### HD HUB KITS

Cat No: H56856-5 (3.00")  
Cat No: H56857-5 (3.50")  
Cat No: H56858-5 (4.00")

### HD HUB KITS

Cat No: EC56856 (3.00")  
Cat No: EC56857 (3.50")  
Cat No: EC56858 (4.00")

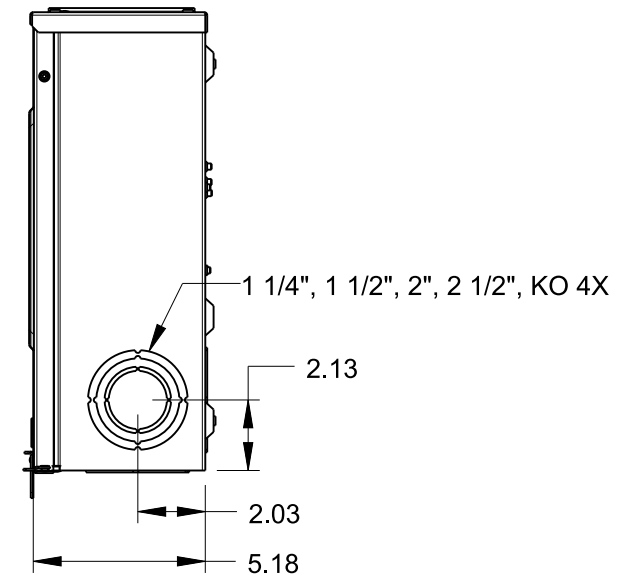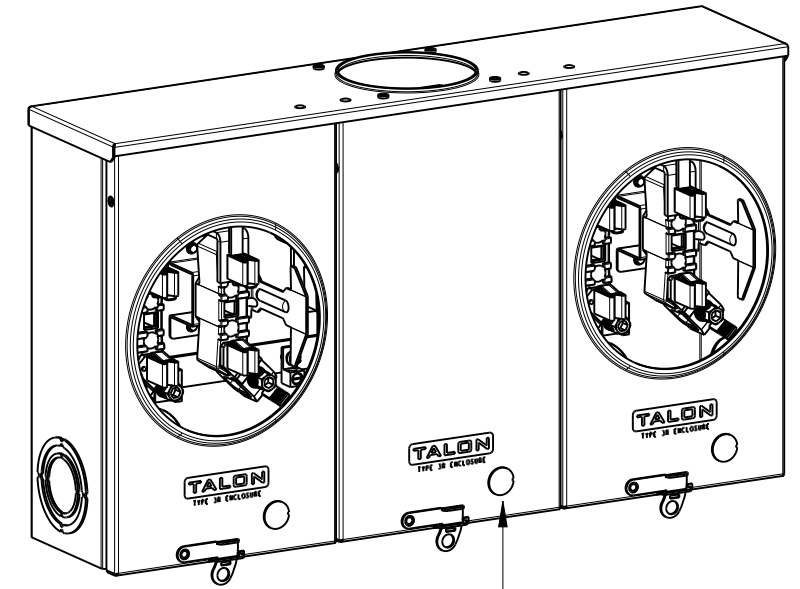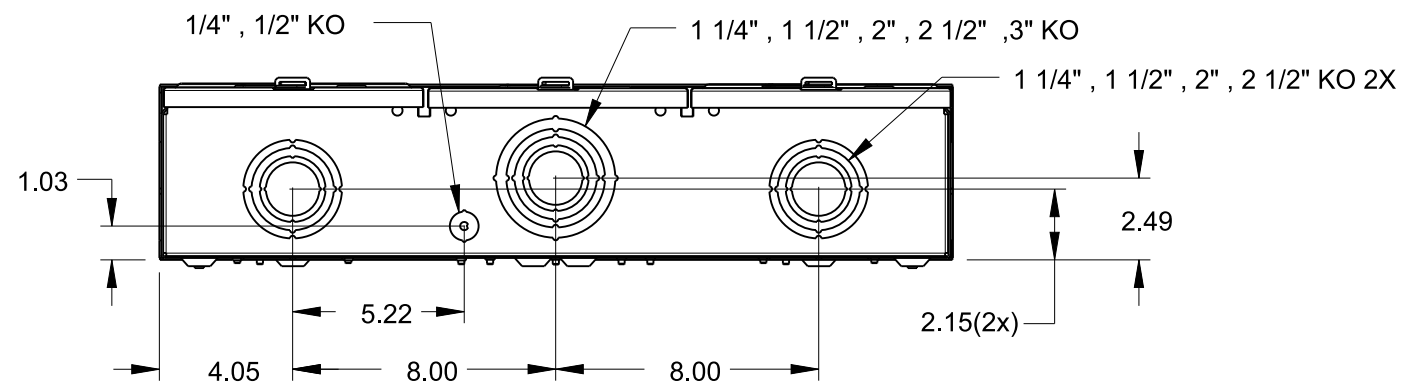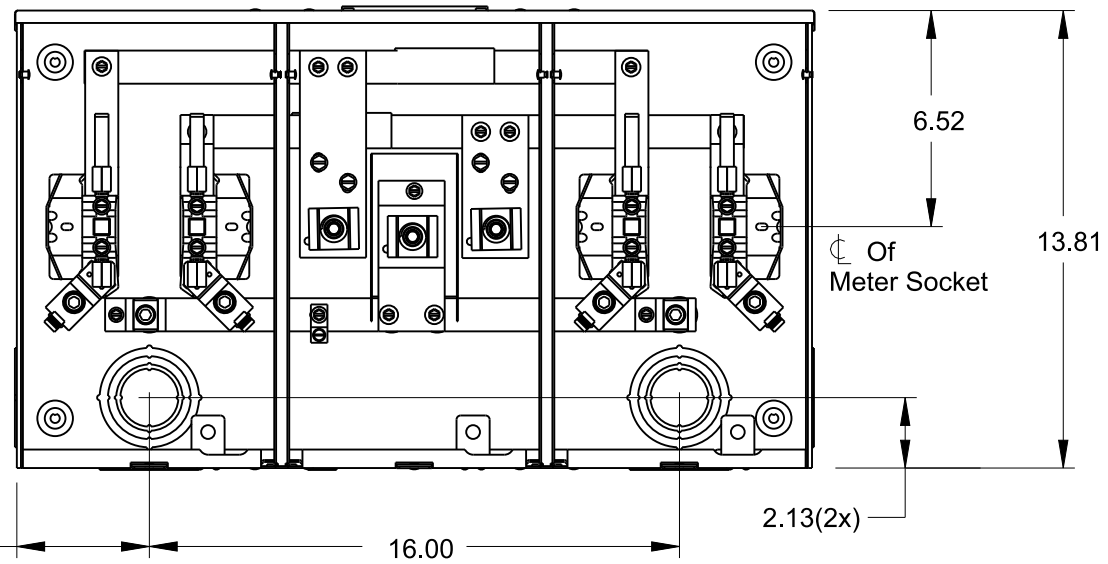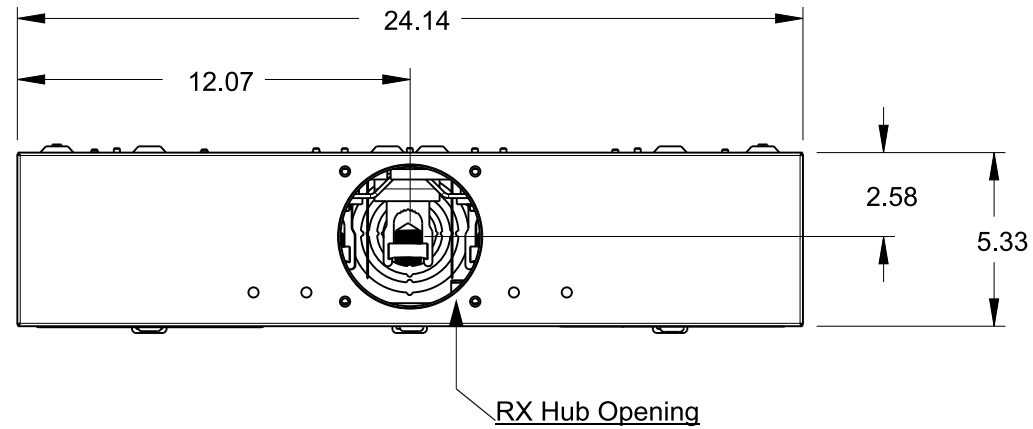

7/8" Barrel Lock Provision

**TALON**

**Multi-Position Metering**

Description:  
**160A Cont, 4 Jaw, A14-2POS, 600V AC,  
Painted G90 Steel**