

Catalog Number: UA3311-0PGP

Features and Ratings

- Ringless Type Meter Socket
- 100A Continuous, 100A Max, 3 Position, 200Amp Overall
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire, 600V AC
- 4 Jaw
- Horn Bypass
- For Overhead or Underground Service
- RX Hub Opening
- 7/8" Barrel Lock Provision

CONNECTORS	WIRE SIZE	TORQUE
LINE	#6-350 Kcmil	250 IN-LB
LOAD	#14-2/0	50 IN-LB
GROUND	#14-2	50 IN-LB

* External Hex drive 1/2"
* Internal Hex drive 5/16"

ACCESSORIES

HUB COVER PLATE
Cat No: H38595-1






5th Terminal Use Talon Kit
Cat No: 659-0121

RX HUB KITS

Cat No: H38598-2 (1.50")
Cat No: H38600-2 (2.50")

RX HUB KITS

Cat No: EC38598 (1.50")
Cat No: EC38600 (2.50")

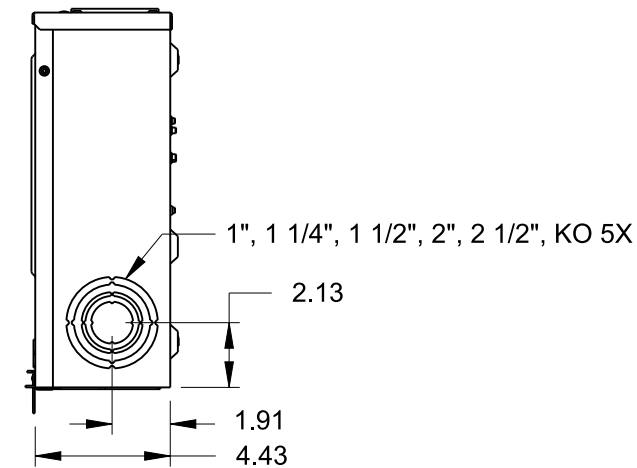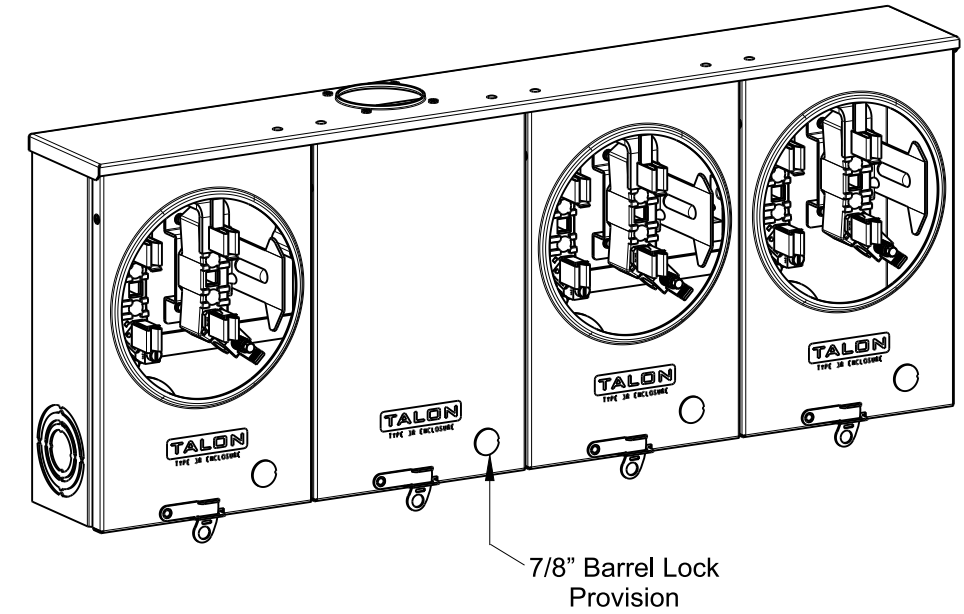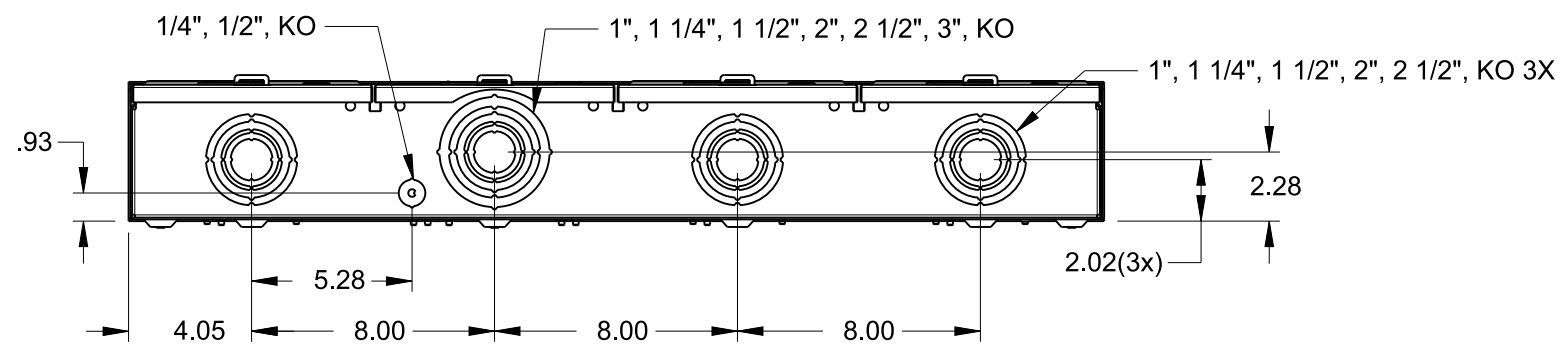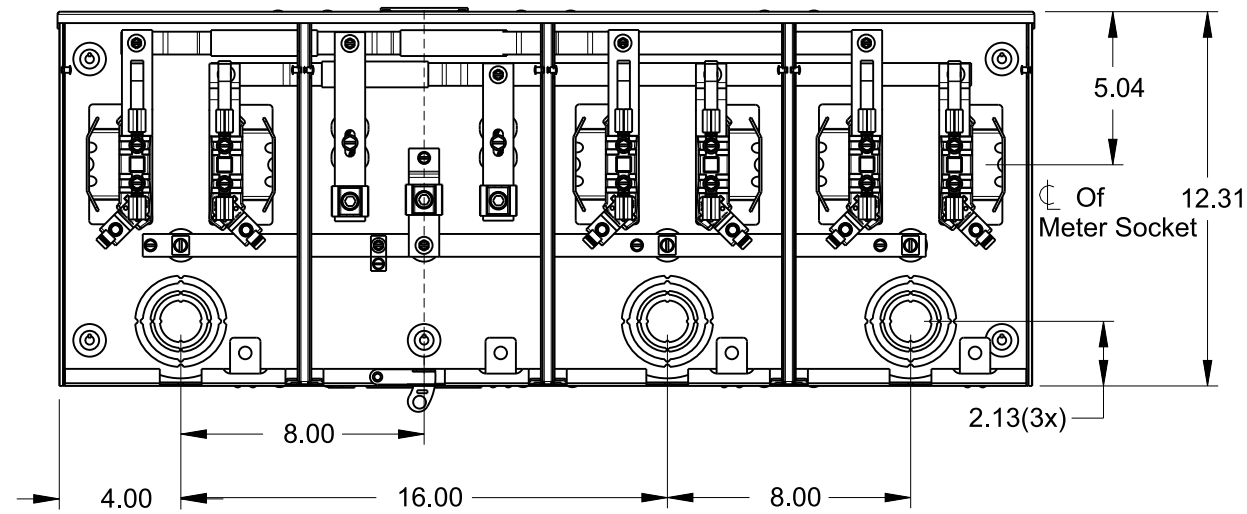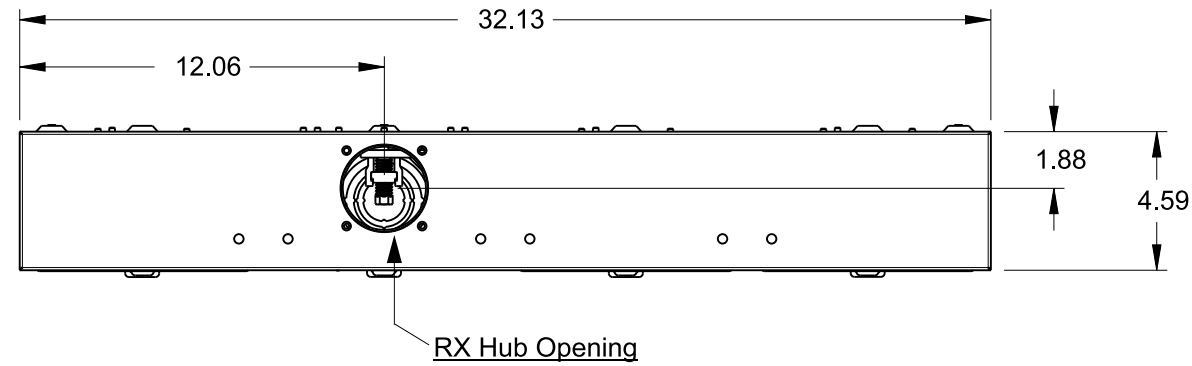

TALON

Multi-Position Metering

Description:
**100A Cont, 4 Jaw, A12-3POS, 600VAC,
Painted G90 Steel**