

Catalog Number: UA3717-YPGP

Features and Ratings

- Ringless Type Meter Socket
- 160A Continuous, 200A Max, 3 Position, 270Amp Overall
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 1 Phase, 3 Wire, 600V AC
- 4 Jaw
- Horn Bypass
- For Overhead or Underground Service
- HD Hub Opening
- 7/8" Barrel Lock Provision

CONNECTORS

CONNECTORS	WIRE SIZE	TORQUE
LINE, NEUTRAL LINE*	#1/0-600 Kcmil	375 IN-LB
LOAD, NEUTRAL LOAD*	#6-350 Kcmil	250 IN-LB
GROUND	#14-2	50 IN-LB

* External Hex drive 1/2"
* Internal Hex drive 5/16"






ACCESSORIES

Meter Opening Cover Plate
Cat No: H39968
HD Cover Plate
Cat No: H56933-2

HD HUB KITS

Cat No: H56856-5 (3.00")
Cat No: H56857-5 (3.50")
Cat No: H56858-5 (4.00")
HD HUB KITS
Cat No: EC56856 (3.00")
Cat No: EC56857 (3.50")
Cat No: EC56858 (4.00")

5th Terminal Use Talon Kit
Cat No: 659-0121

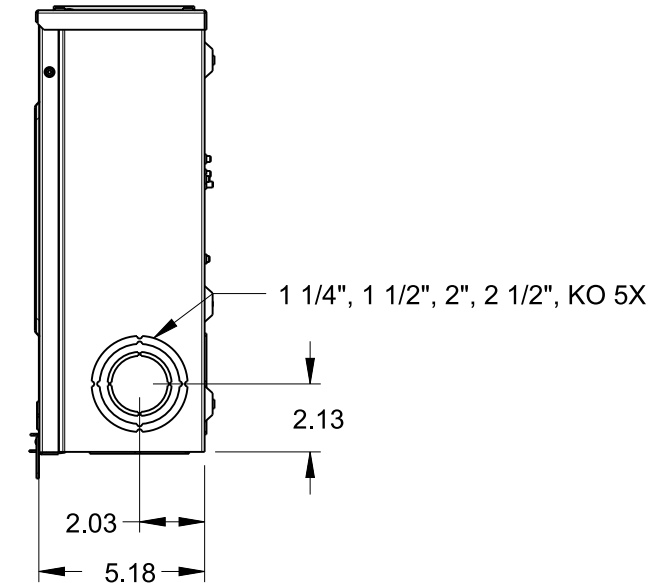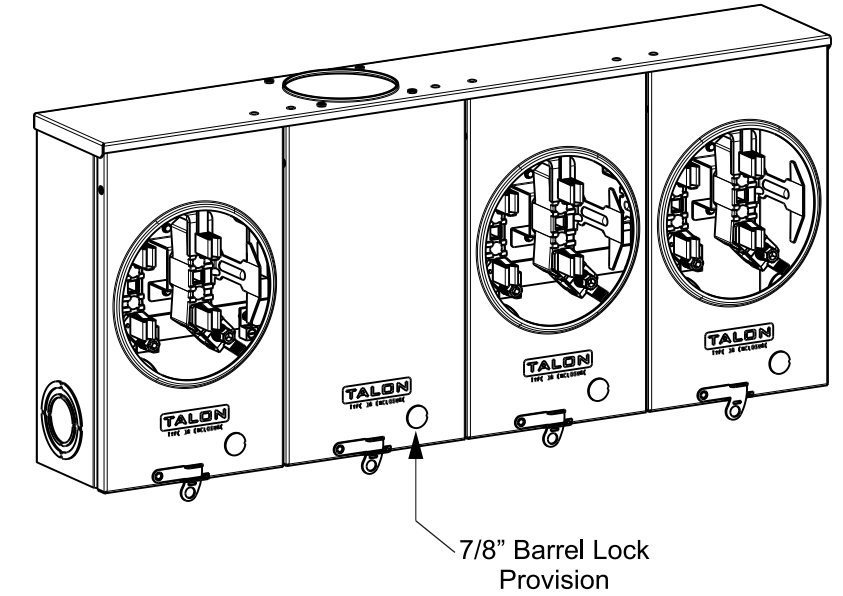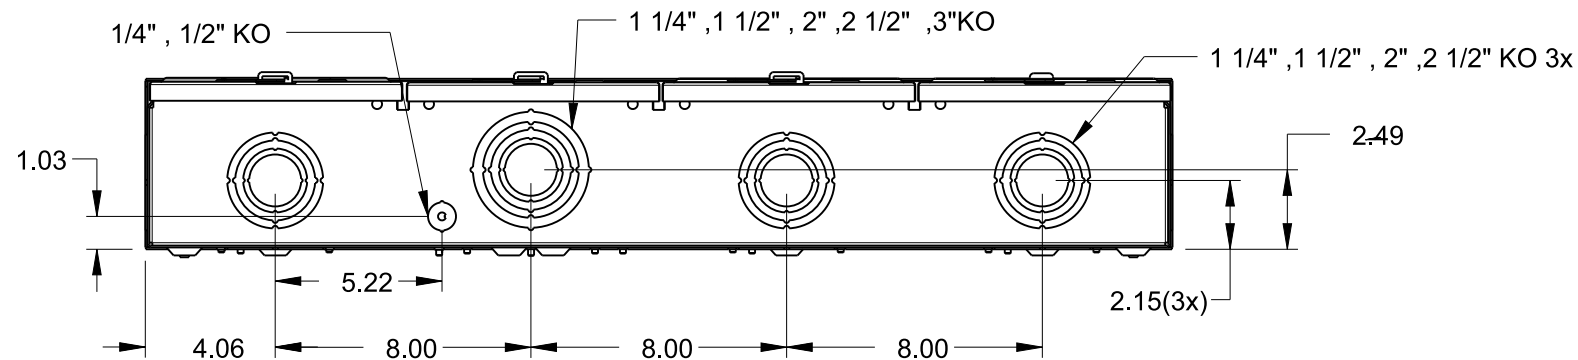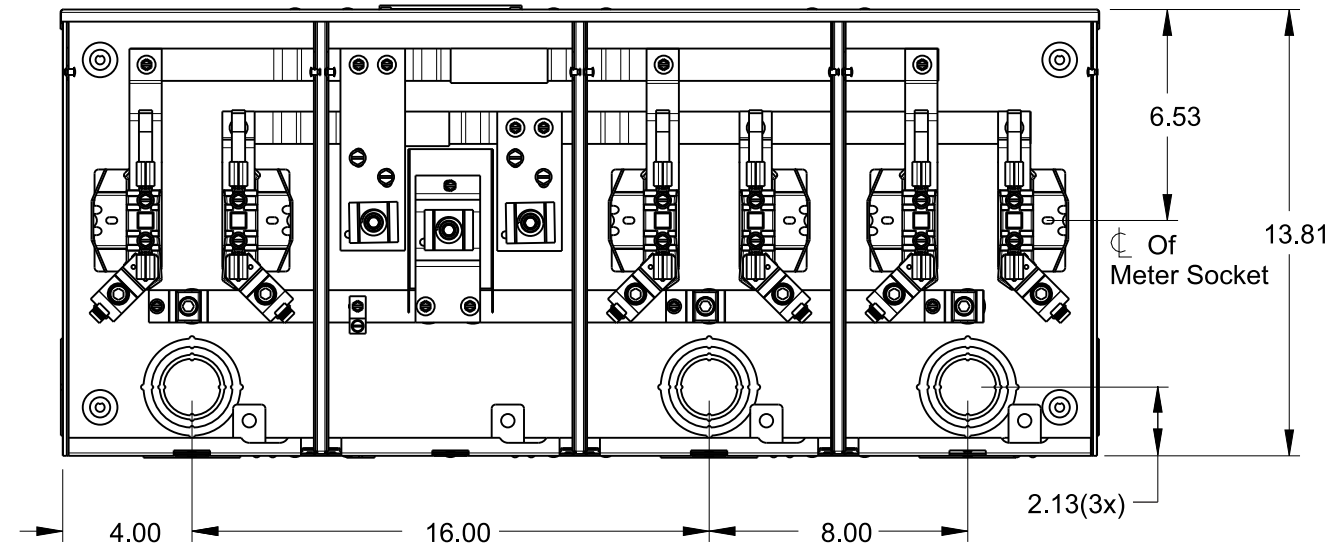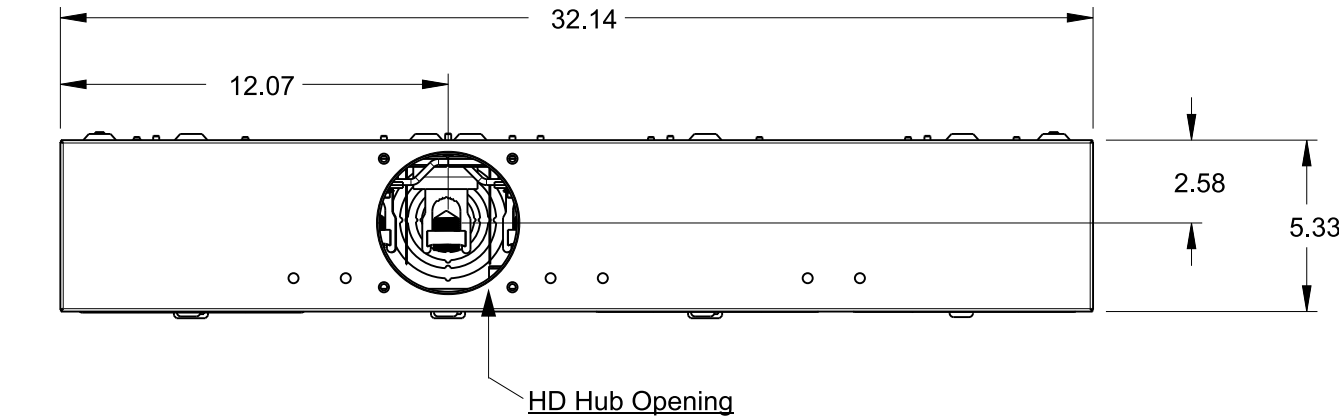

TALON

Multi-Position Metering

Description:
**160A Cont, 4 Jaw, A14-3POS, 600VAC,
Painted G90 Steel**